

# TOURATECH

TOURING RALLYE RACING TECHNOLOGY

01-040-0288-0

Instructions Oilcooler Protection  
BMW R 1150 GS

## Parts Included:

1 x Oilcooler Protection R1150 GS




## Disassembly of the upper fender:

1. Make sure ignition is off. Unscrew the two turn signals lenses, remove the bulb assembly and loosen the wires from the housing. The wires must be passed through the turn signal inward, so that you can dismantle the turn signals.

2. Release the six attaching bolts of the upper fender (see illustration).

3. The upper fender can be now taken off.

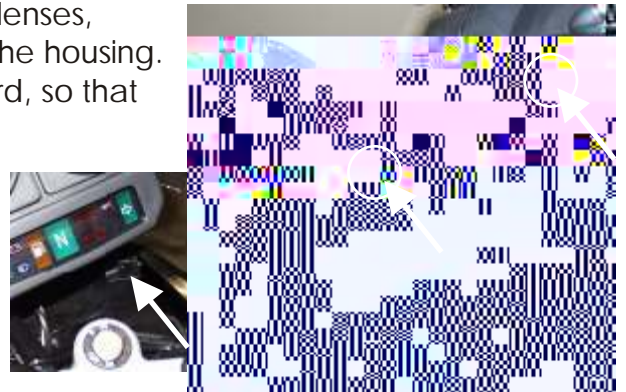

## Mounting Oilcooler Protection:



Loosen the two outside screws, which serve as the mounting of the headlight screen.

If you lift the headlight screen somewhat, you can attach the oil cooler protection to the oil cooler. The shorter bracket of the oil cooler protection belongs upward.

Subsequently, the headlight screen can be bolted on again and be fastened to the upper fender of your motorcycle again as it was. This happens in reverse order of the disassembly.